

## Fiberoptic Sensor - Reflectance Dependent\*

## Model D64

Fiberoptic Cable &amp; Sensor Tip - Actual Size





For The Measurement of Distance, Displacement and Vibration  
of Targets > Ø 1.6 mm

## Features

- Reflectance Dependent Output with Dual Functions Far Side/Near Side
- Ø 1.6 mm Target Spot Size (0.064 inch)
- 6 mm Total Operating Range
- 1.6 mv/µm Far Side Sensitivity
- 50 mv/µm Near Side Sensitivity

## Tip &amp; Cable Dimensions

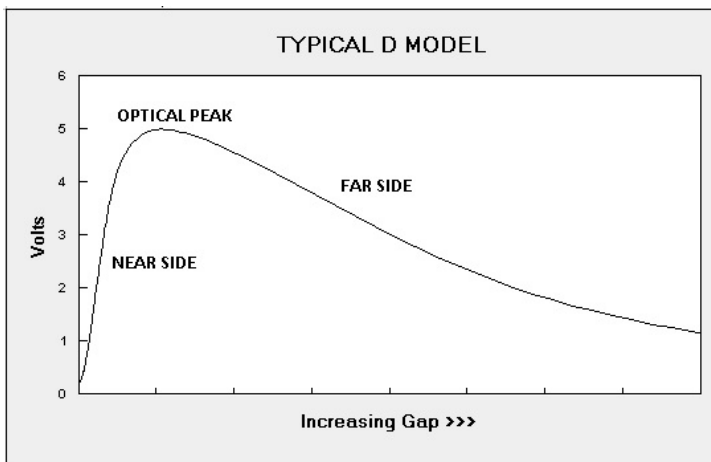

FEATURE	mm	inch
Tip Outer Diameter, Ø C	3.18	0.125
Fiberoptic Diameter	1.6	0.066
Tip Length, C	76.2	3
Collar Length, B	12.7	0.5
Collar Diameter, Ø B	6.35	0.25
Cable Length, A	914	36
Cable Diameter, Ø A	5.7	0.225
Cable Min. Bend Radius	19	0.75

The output function includes a region of maximum output voltage referred to as the OPTICAL PEAK. The useable operating range of these devices includes linear ranges on both sides of the peak, as well as operation at the peak itself. Operation in the NEAR SIDE region gives high sensitivity with limited operating range. Operation on the FAR SIDE gives moderate sensitivity with greater operating range. Operation at the Optical Peak has zero displacement sensitivity, but is reflectance dependent.

\*These are reflective type transducers based upon detecting the intensity of reflected light. The output is proportional to:


- distance between the sensor tip and target; and,
- the reflectivity of the target surface.

D models are commonly used in applications where the target reflectivity stays constant; i.e., the target has a reciprocating or vibratory motion parallel to the axis of the sensor.

**A**nalog sensors are fast responding units ideal for process control and vibration measurements in dynamic applications:

- DC-20 KHz bandwidth is standard
- DC-200 KHz or higher (up to 2 MHz) is optional
- DC-100 Hz providing best resolution, is optional

Standard single channel units include amplifier and sensor tip with 914 mm long (3 foot) fiberoptic cable, require +12 VDC input power, and provide 0 to +5 volt analog output with DC - 20 KHz bandwidth.

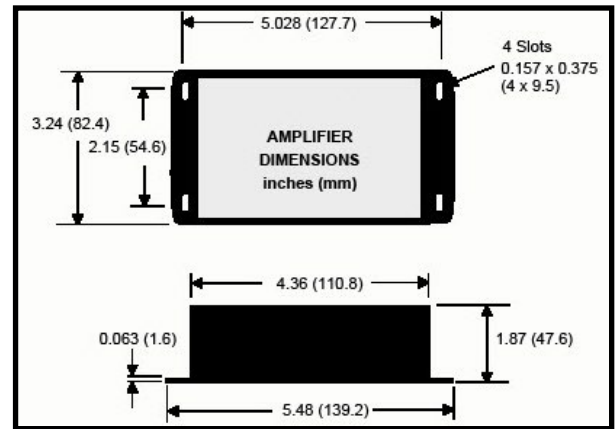


**Standard Enclosure for D Models**

## CONVERTING THE ANALOG OUTPUT TO DISTANCE

A calibration chart is provided with each sensor giving the voltage output response to distance. There are three ways to derive accurate distance measurements:

- within the bounds of the linear range, convert the change in voltage output as follows:  

$$\text{Distance} = \Delta \text{ milliVolts} \div \text{Sensitivity} = \mu\text{m}$$
- over the non-linear range, create a lookup table using the XY calibration data points, or
- use a polynomial curve fit to accurately map the sensor's output function

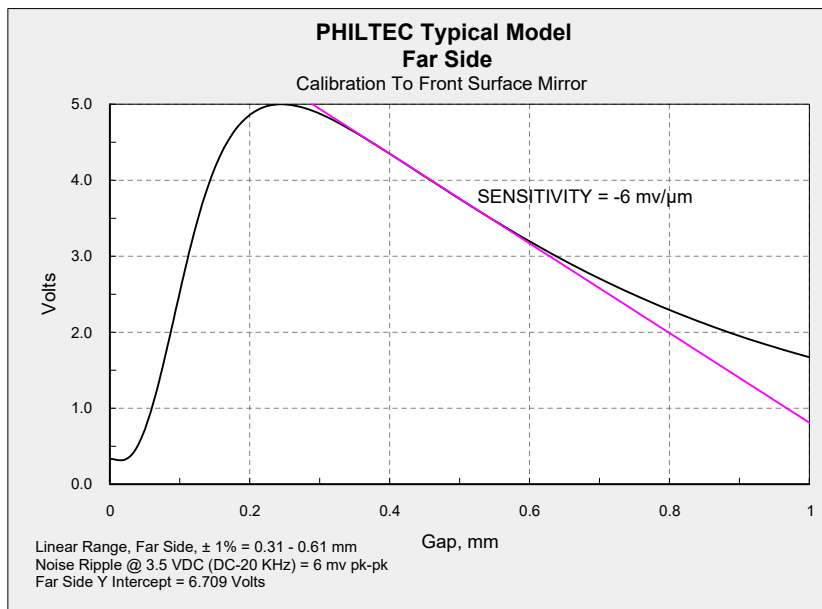

## FACTORY CALIBRATIONS


Calibration charts are provided for Near and Far Side regions. A typical factory supplied calibration chart provides:

- Sensor model & serial number
- Date of calibration
- The linear sensing range
- The slope sensitivity
- The y intercept of the linear range
- The AC noise ripple

The XY calibration data points are made available upon request.

## END USER CALIBRATION

The effect of changing target reflectance is to shift the voltage output higher or lower. Factory calibrations have the Peak Voltage set to 5.000 volts. A gain control is provided for calibration of the sensor output to various target surfaces. In-situ calibration is performed simply, by adjusting the sensor's tip-to-target gap until the peak output voltage is attained, and then by using the gain control to set the peak voltage to full scale (5.000 volts). After setting the peak to 5 volts, the factory gap calibration chart applies for the target being measured. This procedure allows the sensor to be used to perform precision linear motion measurements on most materials.

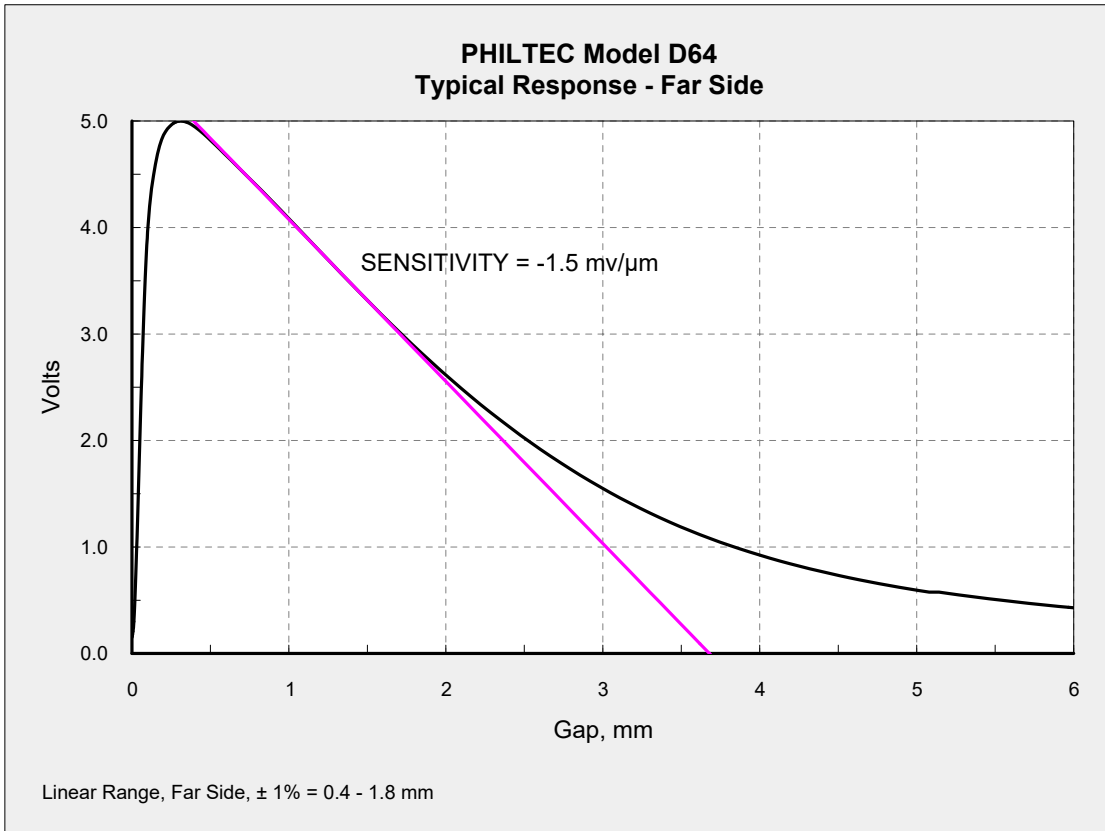

Conversions

- 1 μm = 39.37 μinch
- 1 mm = 39.37 mils
- 1 mil = 0.001 inch
- 1 mil = 25.4 μm
- 1 mil = 0.0254 mm

Standard Specifications - D64 Far Side						
Electronics		Fiberoptics		Analog Output (0-5 Volts)		
Light Source	LED, 850 nm	Light Beam Spread	30°	Total Range	0.230 in.	5.8 mm
Input Voltage	+12 to +24 VDC	Tip Material	300 Series SS	Linear Range*	0.052 in.	1.3 mm
Input Current	125 ma max	Tip Epoxy Outgas	0.3% @ 200°C 2.4% @ 300°C	Nominal Standoff**	0.045 in.	1.1 mm
Bandwidth	DC-20 KHz 3 db down	Tip Operating Pressure	15 bar	Nominal Sensitivity*	33 mv/mil	1.3 mv/μm
Isothermal Drift	0.5%	Tip Operating Temperature	-55 to 200°C continuous; to 300°C intermittent 1-2 hours	Resolution**	DC - 200 KHz DC - 20 KHz DC - 100 Hz	60 μin 40 μin 5 μin
Operating Temperature	0 to 70°C	Cable Operating Temperature	10 to 107°C			
Weight	0.7 kg - 1.5 lbs.	Cable Jacket	PVC over Steel Monocoil			


NOTE: Nominal Standoff = the gap (distance) that places the sensor at the middle of the linear operating range.


\*Standard Specifications provide nominal values only. Actual production values may vary by as much as ±15%.

\*\*These specifications represent best case performance where:  
 the target is flat, smooth and highly reflective,  
 the sensor is perpendicular to the target,  
 the sensor is gapped to its range of highest sensitivity,  
 fiberoptic cable lengths are standard and the cable is not connectorized.

**FREQUENCY RESPONSE**

The standard D sensor has a 20 KHz 2-pole butterworth frequency rolloff. With the 3 db down point set at 20 KHz, the output is flat out to approximately 6 KHz.

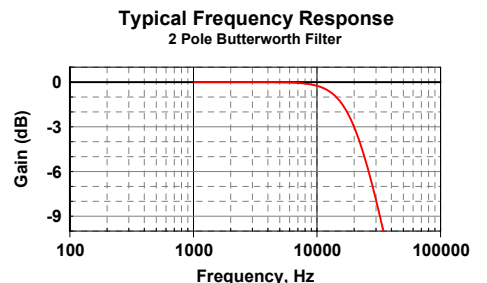

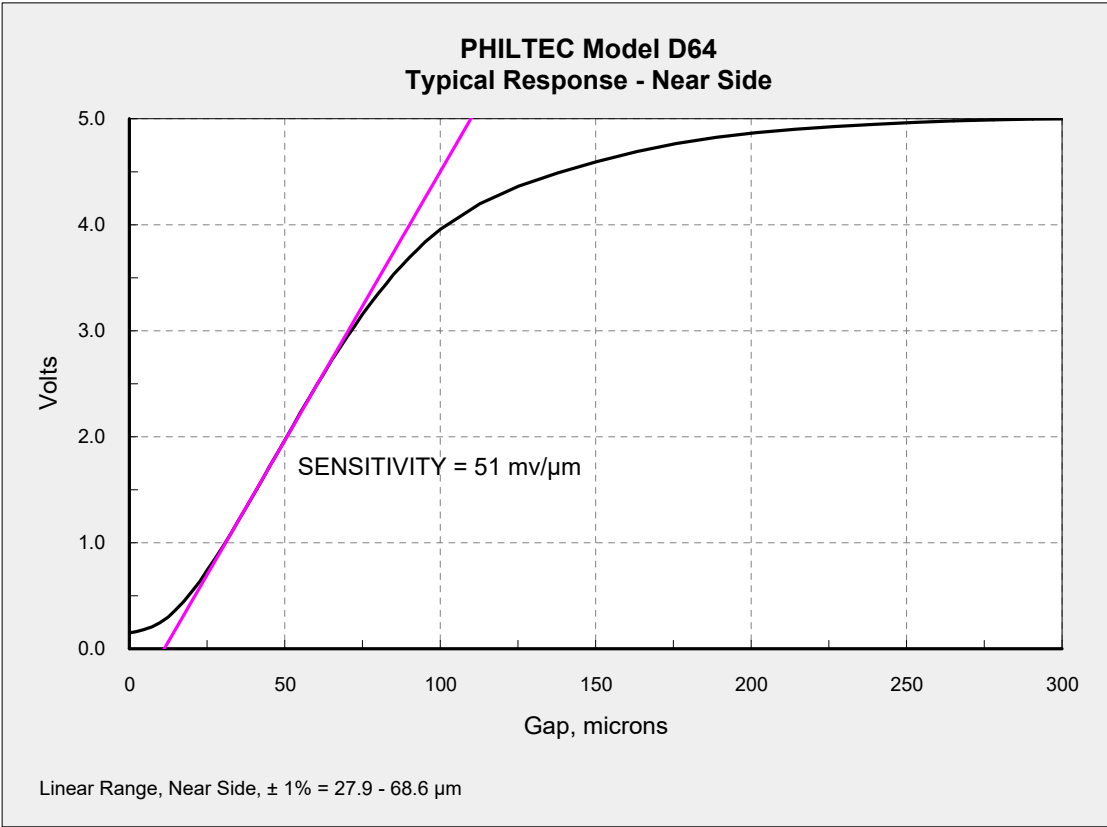

Conversions

1 μm = 39.37 μinch  
1 mm = 39.37 mils

1 mil = 0.001 inch  
1 mil = 25.4 μm  
1 mil = 0.0254 mm

<b>Standard Specifications - D64 Near Side</b>						
<b>Electronics</b>		<b>Fiberoptics</b>		<b>Analog Output (0-5 Volts)</b>		
<b>Light Source</b>	LED, 850 nm	<b>Light Beam Spread</b>	30°	<b>Total Range</b>	0.010 in.	250 μm
<b>Input Voltage</b>	+12 to +24 VDC	<b>Tip Material</b>	300 Series SS	<b>Linear Range*</b>	0.0015 in.	38 μm
<b>Input Current</b>	125 ma max	<b>Tip Epoxy Outgas</b>	0.3% @ 200°C 2.4% @ 300°C	<b>Nominal Standoff*</b>	0.0021 in.	53 μm
<b>Bandwidth</b>	DC-20 KHz 3 db down	<b>Tip Operating Pressure</b>	15 bar	<b>Nominal Sensitivity*</b>	1.2 mv/μin	45 mv/μm
<b>Isothermal Drift</b>	0.5%	<b>Tip Operating Temperature</b>	-55 to 200°C continuous; to 300°C intermittent 1-2 hours	<b>Resolution**</b>		
<b>Operating Temperature</b>	0 to 70°C	<b>Cable Operating Temperature</b>	10 to 107°C	<b>DC - 200 KHz</b>	1.8 μin	45 nm
<b>Weight</b>	0.7 kg - 1.5 lbs.	<b>Cable Jacket</b>	PVC over Steel Monocoil	<b>DC - 20 KHz</b>	1.3 μin	30 nm
				<b>DC - 100 Hz</b>	0.3 μin	8 nm

NOTE: *Nominal Standoff* = the gap (distance) that places the sensor at the middle of the linear operating range.

\*Standard Specifications provide nominal values only. Actual production values may vary by as much as ±15%.

\*\*These specifications represent best case performance where:  
the target is flat, smooth and highly reflective,  
the sensor is perpendicular to the target,  
the sensor is gapped to its range of highest sensitivity,  
fiberoptic cable lengths are standard and the cable is not connectorized.

**FREQUENCY RESPONSE**

The standard D sensor has a 20 KHz 2-pole butterworth frequency rolloff. With the 3 db down point set at 20 KHz, the output is flat out to approximately 6 KHz.

